SCOSCHE

KA2070B

IN-DASH DIN STEREO INSTALLATION KIT FOR 2006-UP KIA RIO/2007 SORENTO
(SINGLE DIN W/POCKET)

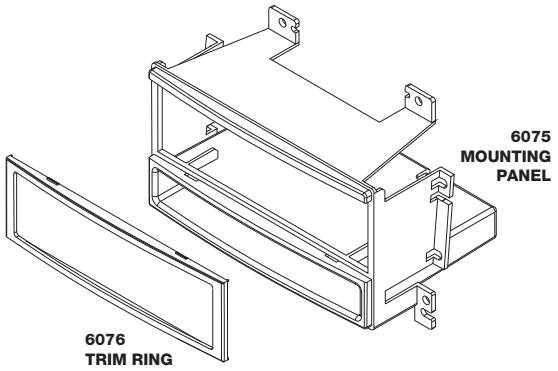

INTRODUCTION/PRELIMINARY

This premium installation kit for 2003-07 KIA Rio/Sorento vehicles. Included are all the parts you need to mount your car stereo or CD player into your vehicle's dash. Refer to the individual instruction in this manual to remove your vehicle's factory radio and assemble the kit.

CAUTION

DISCONNECT YOUR VEHICLE'S NEGATIVE BATTERY TERMINAL BEFORE THE INSTALLATION TO HELP PREVENT ELECTRICAL DAMAGE. WE RECOMMEND THE USE OF A VOLT/OHM METER OVER A TEST LIGHT TO CHECK WIRING. A TEST LIGHT OR GROUNDED WIRE PROBE CAN CAUSE DAMAGE TO THE VEHICLE'S COMPUTER AND/OR DIAGNOSTIC SYSTEMS. AVOID ALL FACTORY AIRBAG WIRING - AIRBAGS CAN ACCIDENTALLY DEPLOY CAUSING SERIOUS INJURY OR DEATH.

NOTES

- See your vehicle's instructions for any special tools your installation might require.
- Read all instructions accompanying your car stereo for proper wiring and mounting instructions.

FACTORY WIRING CODES

For Factory Wiring Codes go to: **www.scosche-cars.com**

CAR STEREO CONNECTORS

PROVIDE EASY CONNECTION OF YOUR CAR STEREO TO FACTORY WIRING HARNESS.

HY07B
2003-07 KIA Sorento
Standard System

LIABILITY DISCLAIMER

This instruction booklet is based on carefully documented data and research of automobile dash disassembly, wire harness/codes and information pertaining to installation of this kit (KA2070B) in 2006-UP KIA Rio/Sorento vehicles. Scosche Industries, Inc. can not be held responsible for discrepancies/inconsistencies that may occur due to the automobile manufacturing changes or options, or damage that may occur in the automobile during the installation of components while using this booklet.

©2007 SCOSCHE INDUSTRIES, INC.

SI 10/07 - MI3017B (3000003)

FACTORY STEREO REMOVAL

2006-UP KIA Rio Radio removal:

1. Using a panel removal tool, remove the dash bezel around the radio. Disconnect and remove panel.
2. Extract (4) Phillips head screws securing the radio to the dash. Disconnect and remove.

2007 KIA Sorento Radio removal

1. With PRT remove under vents on either side of A/C controls.
2. Remove (2) Phillips screws securing radio trim.
3. Unsnap radio trim and remove.
4. Remove (2) Phillips screws securing vents. Disconnect and remove.
6. Remove (4) Phillips screws securing radio to dash. Disconnect harnesses and remove.

MOUNTING THE STEREO

ATTACHING THE SINGLE DIN STEREO

1. Secure the 5990 pocket to the LEFT & RIGHT 5989 brackets with the (2) supplied screws.
2. Mount the aftermarket stereo to the mounting brackets with the stereo's supplied screws.

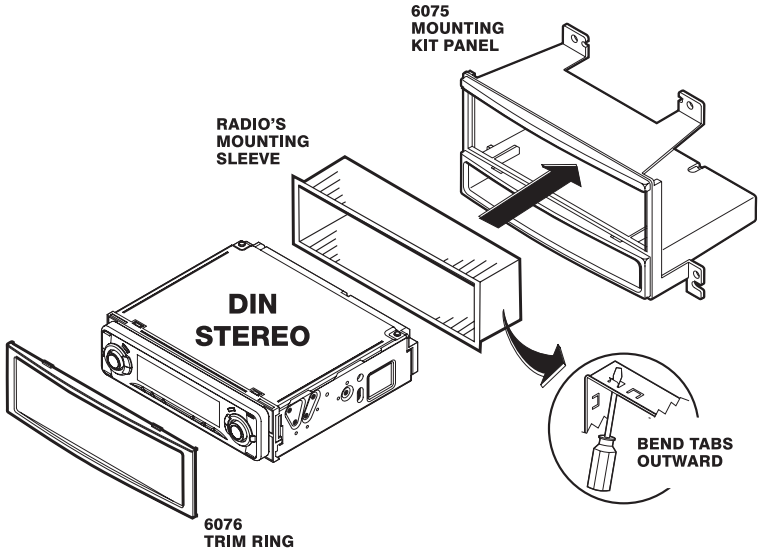

2006-UP KIA Sorento
Use the shaded tabs that correspond to your specific vehicle, discard the remaining tabs.



2006-UP KIA Rio
Use the shaded tabs that correspond to your specific vehicle, discard the remaining tabs.



If you have any further questions, or need dash disassembly instructions, call our TOLL-FREE number:

TECHNICAL HELP line 1-800-621-3695 x3